



TRACKOUT CONTROL MAT


Technical Data Sheet

GENERAL INFORMATION

The FODS Composite trackout control system is designed to be used as a temporary construction entrance which provides site access while minimizing sediment leaving the site. The top surface of the FODS mat is a geometric pattern formed in the shape of pyramids. The mats are unidirectional and are meant to have the staggered pyramids in the direction of travel. Individual mats are connected together with hardware to form various configurations to fit your jobsite.

- Mat Size: 12'(w) x 7' (l) x 3 3/4" (t) (2 7/8" pyramid height)
- Mat Weight: 430lbs
- Pallet Size: 8-Mats
- Truck-Load: 96-Mats
- Hardware boxes is contain within mats pallets


FEATURES & BENEFITS

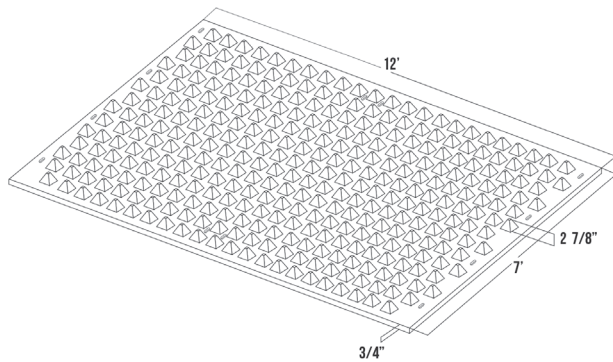

- Reusable
- Increased Effectiveness at Reducing Site Trackout
- U/V Stable
- Highly Visible
- Easy to Clean
- Economical
- Recyclable / Reduces Waste
- Extreme Durability
- Rapid Installation & Removal
- Excavation not required
- Chemical Resistant
- Rock-less
- Reduces Waste
- Easy and efficient to transport from site-site

TYPICAL INSTALLATION LAYOUTS

Each site must be evaluated to determine the proper layout, width, and duration of the FODS Trackout Control System (FTCS) based site conditions, entry and exit egress, traffic levels, site soil conditions, and ability to the maintain trackout system. Outlined below are a number of common layouts, the mats are unidirectional and due to the versatility of the mats design the FTCS can be engineered to fit the needs of any site:

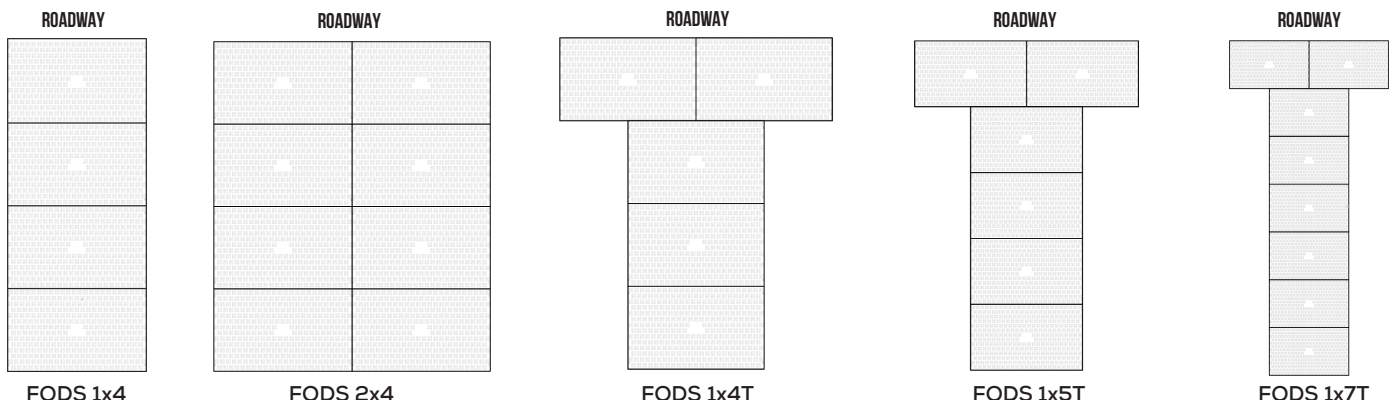

FODS Trackout Control Mat - Technical Data Sheet



COMMON USERS

- Heavy Civil Construction
- Urban Construction / Urban In-Fill
- Bridge & Highway Projects
- Residential Construction
- Land Development
- Forestry
- Energy Exploration
- Oil & Gas Pipeline
- Electrical Power-line
- Temporary Event Access
- Landfill & Waste Management
- Mining



SUITABLE INSTALLATION SUBSTRATE

- Un-Excavated Soil
- Excavated Soil (Min CBR: 4)
- Asphalt
- Concrete

FODS Trackout Control System should be installed near the site exit point, as close to the location where vehicles enter the roadway as safely as possible. FODS mats should not be installed at a low point on the site where water will pool.



FODS ANCHORING SYSTEMS

- Form-Stakes (18" or 24")
- Concrete Sleeve Anchor (asphalt)
- Suitable Anchor for Substrate

CLEANING / MAINTENANCE

- Skid-steer broom attachment
- FODS Shovel
- Street Sweeper (requires adjusted bristle head)
- Pressure Washer (must have ability to contain water)
- Water Truck (must have ability to contain water)

*****Before using earth anchors,
call 811 for locates to mark
underground utilities*****

